

DEA[®]



SLIDING

LIVI 400

Automation for sliding gates




The products



Metal body and highly sturdy components.



All control boards included in the RR range can be easily programmed through display

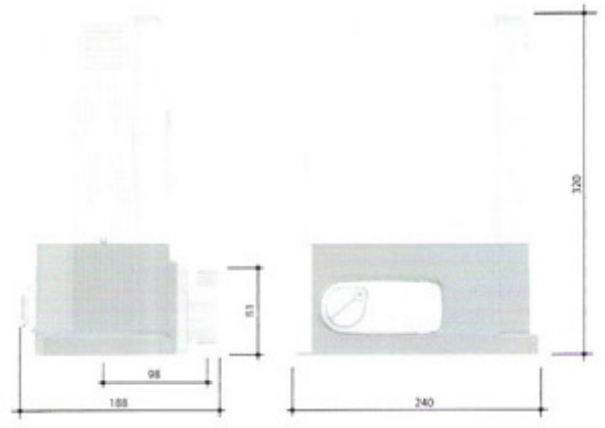

Simple unlocking system by key.

Technical information

Model	400	800	3/24RR
Power supply (V) (50/60 Hz)	230 AC	230 AC	230 AC
Motor power supply (V)	230 V AC	230 V AC	24 V DC
Incorporated condenser (uF)	8	12,5	-
Motor thermal protection (°C)	140	150	-
Power consumption (W)	320	450	80
Duty cycle	30%	50%	80%
Max thrust (N)	340	490	210
Operating temperature (°C)	-20°÷60°	-20°÷60°	-20°÷60°
Speed (mt/m)	10	10	10
Protection level	IPX4	IPX4	IPX4
Weight (kg)	11	12,5	12



DEA SYSTEM S.r.l.
 GATE AUTOMATION
 36010 Zané (Vicenza) Italy - Via Monte Summano, 45E
 Telefono: +39-0445-314944 - Telefax: +39-0445-314334
 http://www.deasystem.com
 deasystem@deasystem.com

DEALER STAMP