

dea
system

www.deasystem.com



Automation for swing gates

mac



DEA[®]


Automation for gates, doors and barriers



mac

FORCE AND RELIABILITY

Electromechanical linear ram
for swing gates

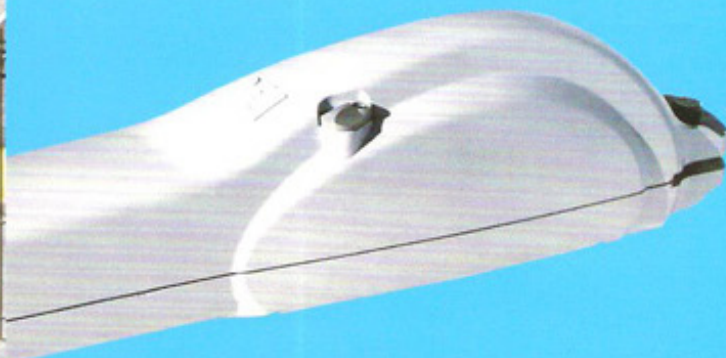

CE

- Electromechanical automation, 24V d.c.
- Suitable for leaves up to 4,5 m long.
- Easy to install.
- Simple and safe manual unlocking device by special key.
- Fast and silent.
- Internal electrical terminals, to make easier and faster the wiring of motor.
- Rear fastening plate with several holes, for an easier fixing

Mac the new electro-mechanical ram, reliable and sturdy along time. This device doesn't require any maintenance or internal adjustments and the installation, easy and fast, doesn't modify the gate structure.

THE PRODUCTS

SWING GATES



SLIDING GATES



SECTIONAL AND GARAGE DOORS



ELECTROMECHANICAL BARRIERS



Stop/Pass


ROLLER




Lift

Will

DIMENSIONS


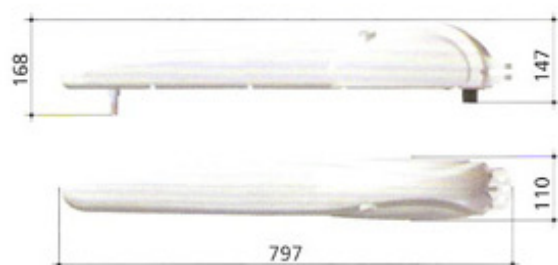


Rapid unlocking device

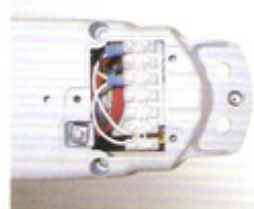

Internal terminal board for an easier connection of the operator

USE LIMITS

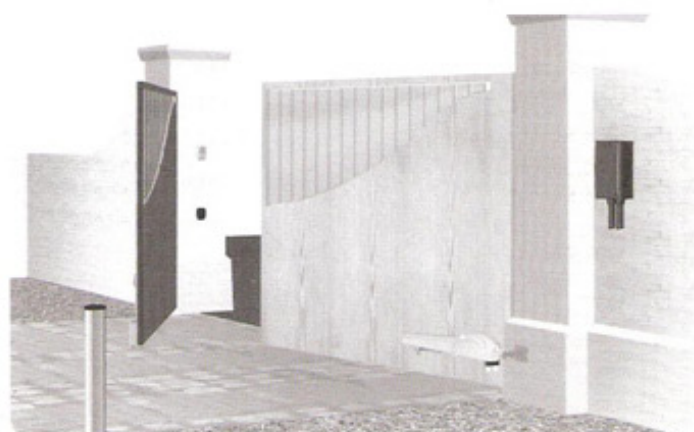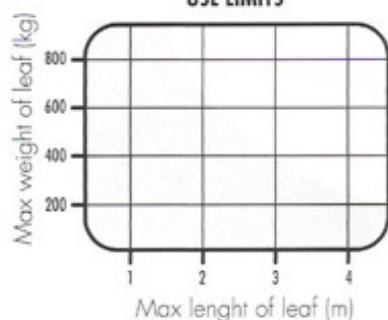

ACCESSORIES



MAC/SFR
Adjustable fixing plates for MAC.



MAC/FM
Mechanical stops for MAC.

TECHNICAL INFORMATION

Model	MAC/ 24
Power supply (V)	230 V a.c.
Motor power supply (V)	24 V d.c.
Capacity (W)	60
Duty cycle	50%
Max thrust (N)	600
Max stroke (mm)	390
Max gate weight (Kg)	200 up to 800
Weight with packing (Kg)	8,6
Operating temperature (°C)	-20°/+60°
Protection level	IP 34



ISO 9001 certified company
Certificate n. 50 100 5350



DEA SYSTEM S.p.A.

Automation for gates, doors and barriers

Via della Tecnica, 6 - 36013 PIOVENE ROCCHETTE (VI) - ITALY

Telefono: +39 0445 550789 - Fax: +39 0445 550265

www.deasystem.com - info@deasystem.com